

# ULTRALX<sup>®</sup> AC90/MC EZ-Whips



Meets or exceeds the following requirements:

- CSA 22.2 No. 203.1 (Manufactured Wiring Systems)
- UL 183 (Manufactured Wiring Systems)



## Features

- Realize up to 45% labour savings using snap-in and push-in WAGO<sup>®</sup> connectors.
- Snap-in design excellent for retrofit applications.
- For use in lighting and branch circuit applications.
- No tools. No wire nuts required.
- cCSAus Certified Wiring Systems for use in Canada and the USA. Complies with the CEC and NEC.
- Constructed with ULTRALX Dual-Listed AC90/MC Armoured Cable (Meeting CSA 22.2 No. 51-95 and UL 1569).
- Lighter and more compact than flexible conduit products.
- Available in a variety of construction options to suit multiple project environments.
- 4m standard lengths. Other lengths available on request.

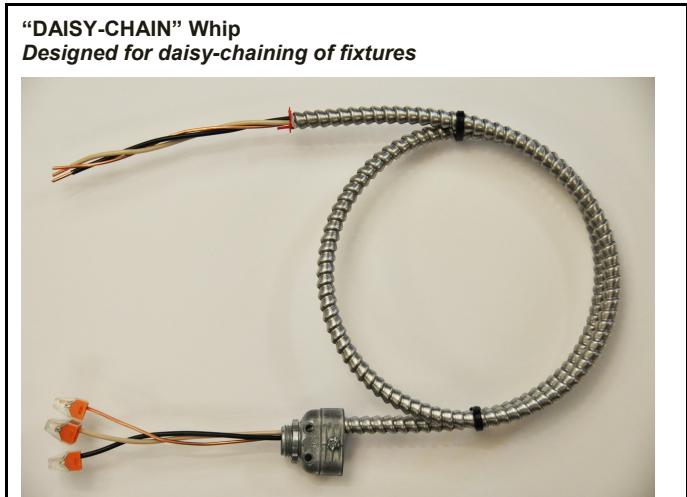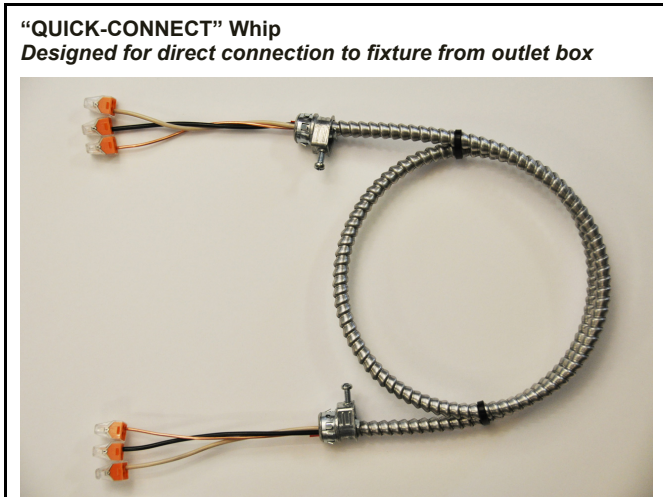

ULTRALX Quick Connect Whip Catalogue Numbers		
Configuration	Standard Connectors	Snap-In Connectors
14/2	A/UQCACMC142SO	A/UQCSTACMC142SO
14/3	A/UQCACMC143SO	A/UQCSTACMC143SO
14/4	A/UQCACMC144SO	A/UQCSTACMC144SO
12/2	A/UQCACMC122SO	A/UQCSTACMC122SO
12/3	A/UQCACMC123SO	A/UQCSTACMC123SO
12/4	A/UQCACMC124SO	A/UQCSTACMC124SO
14/2 +IG	A/UQCACMC142IGSO	A/UQCSTACMC142IGSO
12/2 +IG	A/UQCACMC122IGSO	A/UQCSTACMC122IGSO
12/2 +DALI	A/UQCACMC122DALISO	A/UQCSTACMC122DALISO
Add “W” to end of Cat no. for WAGO connectors added.		
Standard Length 4m		Packaging: 40/box 320/lot

ULTRALX Daisy Chain Whip Catalogue Numbers		
Configuration	Standard Connectors	Snap-In Connectors
14/2	A/UDCACMC142SO	A/UDCSTACMC142SO
14/3	A/UDCACMC143SO	A/UDCSTACMC143SO
14/3	A/UDCACMC144SO	A/UDCSTACMC144SO
12/2	A/UDCACMC122SO	A/UDCSTACMC122SO
12/3	A/UDCACMC123SO	A/UDCSTACMC123SO
12/4	A/UDCACMC124SO	A/UDCSTACMC124SO
14/2 +IG	A/UDCACMC142IGSO	A/UDCSTACMC142IGSO
12/2 +IG	A/UDCACMC122IGSO	A/UDCSTACMC122IGSO
12/2 +DALI	A/UDCACMC122DALISO	A/UDCSTACMC122DALISO
Add “W” to end of Cat no. for WAGO connectors added.		
Standard Length 4m		Packaging: 40/box 320/lot