


# Control Tap

**Provides connection to control devices/sensors.**

Compact device with integrated cord for quick connection of sensors and other control devices.

## Features and Benefits:

- **ELECTEC EZ-Wiring®** components are UL Listed to be in compliance with UL 183 – Manufactured Wiring Systems (QQVX) and CSA Certified to be in compliance with CSA 22.2 No. 203-1 - Manufactured Wiring Systems.
- Robust terminal design exceeds 470Amp for 4 seconds.
- **EZ-Wiring®** connectors are integrally moulded (fully encapsulated) utilizing high impact Halogen-free, Eco-Friendly, Low Smoke, UL94-V0 rated, Oxygen Index – 33%, RoHS-compliant polymers for superior strength, reliability and safety.
- Dielectric Withstand 3000Vac.
- Mating connectors are self-latching and shrouded for added protection.
- Uniquely keyed and colour-coded to clearly indicate ratings and provide safe, simple, error-free connectivity. Only connectors having identical colours can plug together properly.
- Suitable for use in environmental air handling spaces (plenums) per NEC 300-22(c) and CEC Part 1 12-010(3)
- Acceptable for interrupting current (make or break) under full load.
- Capping of unused connector openings is optional as **ELECTEC EZ-Wiring®** components have been evaluated to prevent inadvertent contact with live parts.

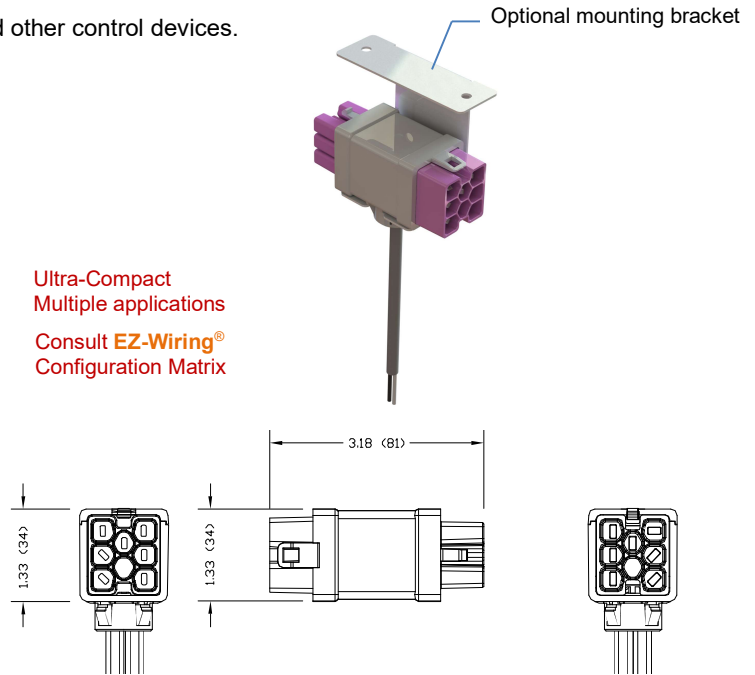

## Ordering Information

Catalogue No.;

1H – VC – LNGO – G III W XYZ

1H	__	__	__	G	__	__	__
----	----	----	----	---	----	----	----

<u>VC</u>	System	<u>2D</u> = 125/250V 20A + Control, <u>4D</u> = 277/480V 20A + Control, <u>6D</u> = 347/600V 20A + Control
<u>LNGO</u>	Application	<u>DALI/Class 1 (Control Wiring)</u> 5w <u>1112</u> = 1 circuit + control (L,N,G,2C)
<u>III</u>	Cord Length (in cm)	<u>030</u> = 12in(30cm), <u>046</u> = 18in(46cm), <u>061</u> = 24in(61cm), <u>076</u> = 30in(76cm), <u>091</u> = 36in(91cm), <u>122</u> = 4ft(122cm), <u>183</u> = 6ft(183cm), <u>244</u> = 8ft(244cm), <u>305</u> = 10ft(305cm), <u>366</u> = 12ft(365cm)
<u>W</u>	Gauge	<u>4</u> = #14AWG, <u>6</u> = #16AWG, <u>8</u> = #18AWG
<u>XYZ</u>	(X) Cord Type (Y) Cord Colour (Z) Other Options	<u>C</u> = CL3P/CMP (FT6) <u>B</u> = Black, <u>G</u> = Gray, <u>N</u> = Natural <u>A</u> = Quick-connector style "A", <u>M</u> = Quick-connector style "M", <u>W</u> = Wire connector, <u>blank</u> = none

Adhere to all Code requirements and carefully follow installation instructions

