

- ① BRASS BLADE
- ② BRASS GROUND PIN
- ③ BRASS GROUND TERMINAL
- ④ BRASS TERMINAL
- ⑤ MOULDED THERMOPLASTIC
- ⑥ CERTIFIED WIRING MATERIAL
- ⑦ RETAINING CLIP

WHERE "cc" REPRESENTS COLOUR CODE I.E. "BK" IS BLACK

ACCEPTABLE MEANS FOR DISCONNECTING LUMINARIES
ACCEPTABLE FOR USE IN ENVIRONMENTAL AIR SPACES OTHER THAN DUCTS OR PLENUMS.
SYSTEM IS RATED FOR CONNECTION TO A GROUNDED 125V BRANCH CIRCUIT.

- MEETS OR EXCEEDS:**
- CSA 22.2 NO. 182.3
 - CSA 22.2 NO. 203.1
 - UL 1977
 - UL 183



125 Volt 20 Amp

CDN. PATENT - 1219307

U.S. PATENT - 4775802

ITEM	DESCRIPTION	PART#/POSITION	REMARKS
6	GREEN	1	GROUND
	WHITE	2	NEUTRAL
	BLACK	3	LINE



100-5977 HAZELDEAN ROAD, OTTAWA, ONTARIO, CANADA K2S 1B9
 TELEPHONE (613) 836-0300 FAX (613) 836-0391
 TOLL-FREE (866) 233-5328 FAX (866) 933-1933
 e-mail: support@electeconline.com

OWNERSHIP OF DOCUMENTS

This drawing and accompanying information as instrument of service are the property of **ELECTEC**. Reproduction or use in whole or in part in any form whether the work for which they are presented be executed or not is forbidden without the express written permission of **ELECTEC**.




FIXTURE INTERCEPTOR

100125FI_{cc}


DRAWN BY: J.Y. APPROVED: D.H.

DATE: 21-OCT-08 SCALE: N.T.S.

100125FI.9

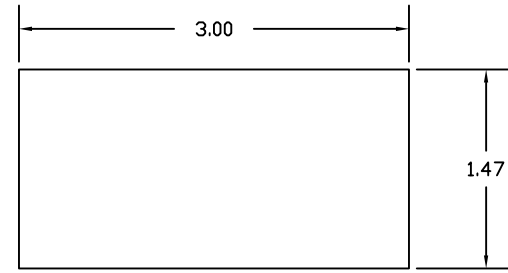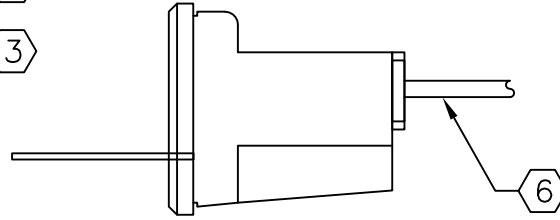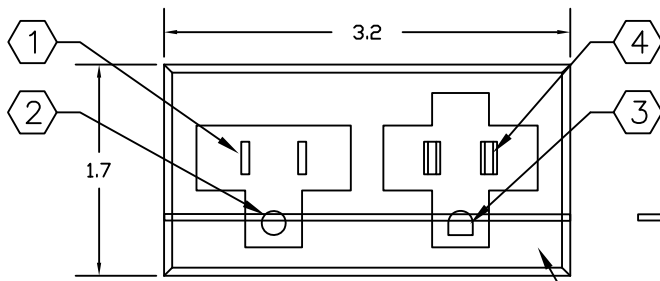

PANEL CUTOUT DETAIL

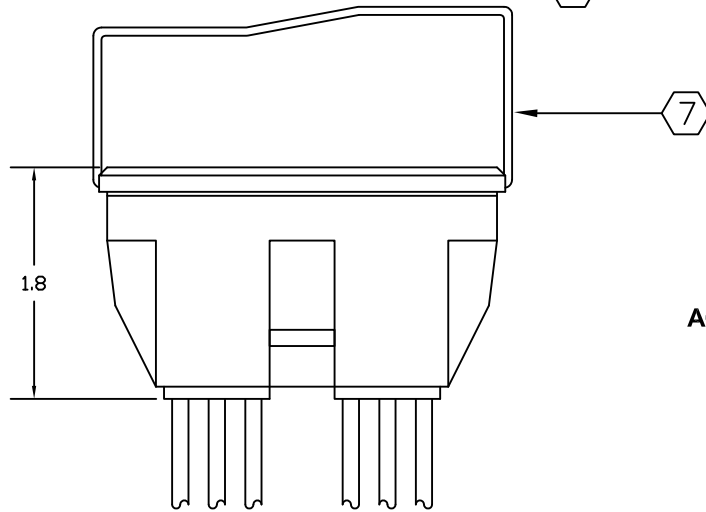

- ① BRASS BLADE
- ② BRASS GROUND PIN
- ③ BRASS GROUND TERMINAL
- ④ BRASS TERMINAL
- ⑤ MOULDED THERMOPLASTIC
- ⑥ CERTIFIED WIRING MATERIAL
- ⑦ RETAINING CLIP

WHERE "cc" REPRESENTS COLOUR CODE I.E. "BK" IS BLACK

ACCEPTABLE MEANS FOR DISCONNECTING LUMINARIES
ACCEPTABLE FOR USE IN ENVIRONMENTAL AIR SPACES OTHER THAN DUCTS OR PLENUMS.
SYSTEM IS RATED FOR CONNECTION TO A GROUNDED 125V BRANCH CIRCUIT.

MEETS OR EXCEEDS: - CSA 22.2 NO. 182.3
 - CSA 22.2 NO. 203.1
 - UL 1977
 - UL 183



125 Volt 20 Amp

CDN. PATENT - 1219307

U.S. PATENT - 4775802

ITEM	DESCRIPTION	PART#/POSITION	REMARKS
6	GREEN	1	GROUND
	WHITE	2	NEUTRAL
	BLACK	3	LINE




100-5977 HAZELDEAN ROAD, OTTAWA, ONTARIO, CANADA K2S 1B9
 TELEPHONE (613) 836-0300 FAX (613) 836-0391
 TOLL-FREE (866) 233-5328 FAX (866) 933-1933
 e-mail: support@electeconline.com

OWNERSHIP OF DOCUMENTS
 This drawing and accompanying information as instrument of service are the property of **ELECTEC**.
 Reproduction or use in whole or in part in any form whether the work for which they are presented be executed or not is forbidden without the express written permission of **ELECTEC**.

DUAL PLUG/RECEPTACLE

100125PTRTcc

DRAWN BY: J.Y.	APPROVED: D.H.	100125PTRT.8
DATE: 21-OCT-08	SCALE: N.T.S.	

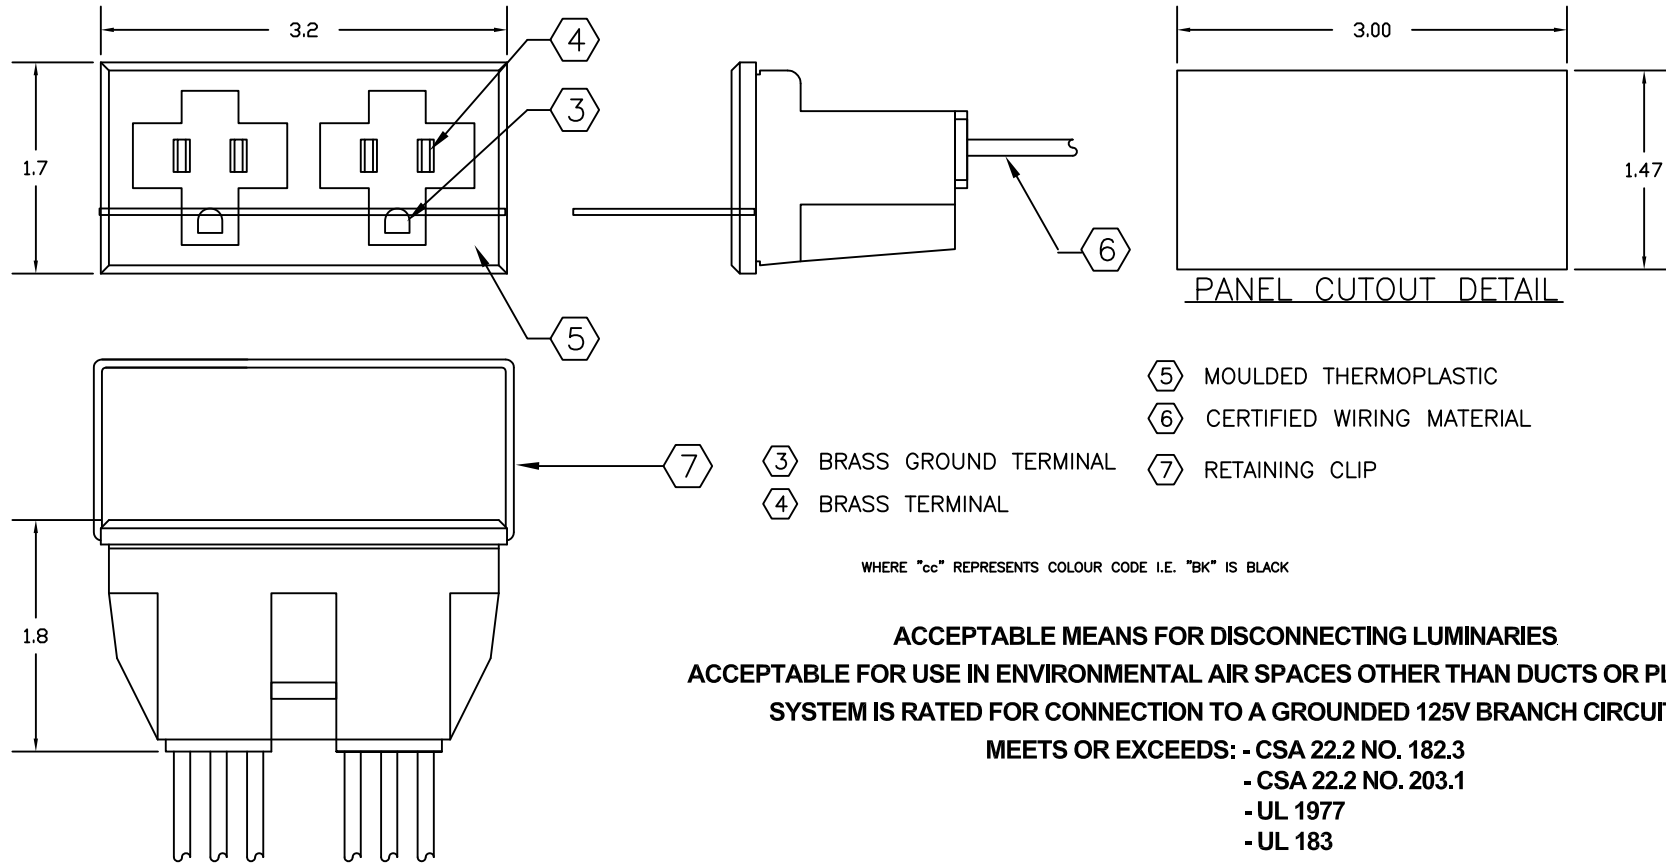

WHERE "cc" REPRESENTS COLOUR CODE I.E. "BK" IS BLACK

ACCEPTABLE MEANS FOR DISCONNECTING LUMINARIES
ACCEPTABLE FOR USE IN ENVIRONMENTAL AIR SPACES OTHER THAN DUCTS OR PLENUMS.
SYSTEM IS RATED FOR CONNECTION TO A GROUNDED 125V BRANCH CIRCUIT.

MEETS OR EXCEEDS: - CSA 22.2 NO. 182.3
 - CSA 22.2 NO. 203.1
 - UL 1977
 - UL 183



125 Volt 20 Amp

CDN. PATENT - 1219307

U.S. PATENT - 4775802

ITEM	DESCRIPTION	PART#/POSITION	REMARKS
6	GREEN	1	GROUND
	WHITE	2	NEUTRAL
	BLACK	3	LINE




100-5977 HAZELDEAN ROAD, OTTAWA, ONTARIO, CANADA K2S 1B9
 TELEPHONE (613) 836-0300 FAX (613) 836-0391
 TOLL-FREE (866) 233-5328 FAX (866) 933-1933
 e-mail: support@electeconline.com

OWNERSHIP OF DOCUMENTS
 This drawing and accompanying information as instrument of service are the property of **ELECTEC**.
 Reproduction or use in whole or in part in any form whether the work for which they are presented be executed or not is forbidden without the express written permission of **ELECTEC**.

DUAL PLUG/RECEPTACLE

100125RTRTcc

DRAWN BY: J.Y.	APPROVED: D.H.	100125RTRT.8
DATE: 21-OCT-08	SCALE: N.T.S.	

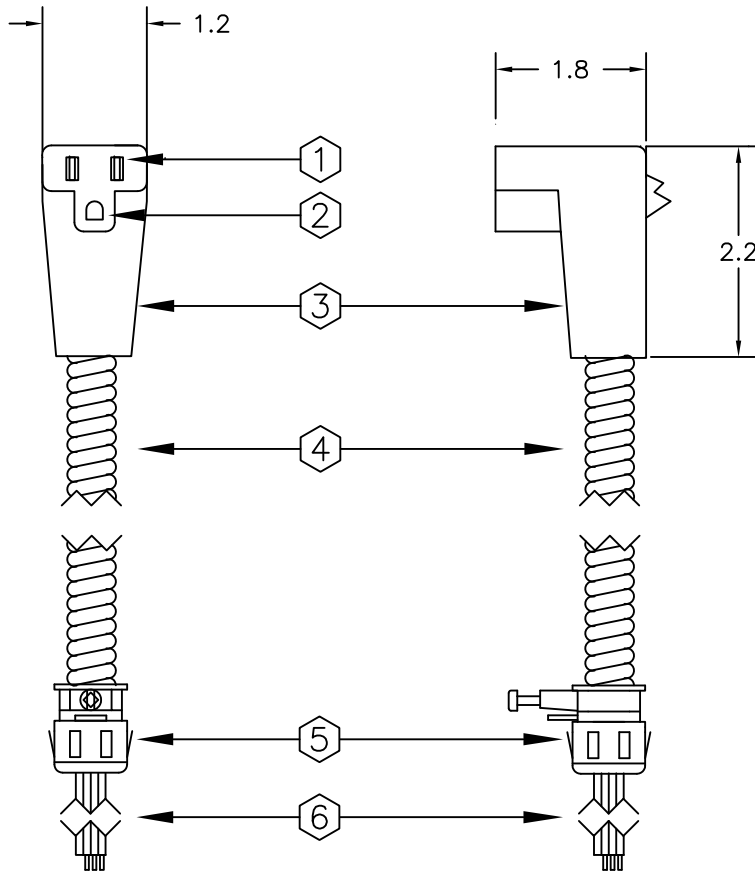

- ① BRASS TERMINAL
- ② BRASS GROUND TERMINAL
- ③ MOULDED THERMOPLASTIC
- ④ "ULTRALX" AC90 LS 600V 90°C (CSA 22.2 No. 51-95)
- ⑤ LOCKNUTLESS BOX CONNECTOR 1/2" K.O.
- ⑥ TAIL WITH STRIPPED ENDS

WHERE "cc" REPRESENTS COLOUR CODE I.E. "BK" IS BLACK
 WHERE "d" REPRESENTS CERTIFIED WIRING MATERIAL. I.E. "A" IS AC90
 WHERE "l" REPRESENTS LENGTH CODE I.E. "040" IS 04.0 METERS


SYSTEM IS RATED FOR CONNECTION TO A GROUNDED 125V BRANCH CIRCUIT.
MANUFACTURED WIRING SYSTEM UTILIZING 12 AWG APPROVED ULTRALX CABLE.
INSTALLATION IN ACCORDANCE WITH THE CEC PART I OR THE NEC.
ACCEPTABLE FOR USE IN ENVIRONMENTAL AIR SPACES OTHER THAN DUCTS OR PLENUMS
PER CEC PART I 12-010(3) OR NEC 300-22(C)
MEETS OR EXCEEDS: - CSA 22.2 NO. 203.1
- UL 183
ACCEPTABLE MEANS FOR DISCONNECTING LUMINAIRES
PER CEC PART I 30-308(4) OR NEC 410.73(G).



125 Volt 20 Amp

CDN. PATENT - 1219307 U.S. PATENT - 4775802

ITEM	DESCRIPTION	PART#/POSITION	REMARKS
4	BARE	1	GROUND
	WHITE	2	NEUTRAL
	BLACK	3	LINE



100-5977 HAZELDEAN ROAD, OTTAWA, ONTARIO, CANADA K2S 1B9
 TELEPHONE (613) 836-0300 FAX (613) 836-0391
 TOLL-FREE (866) 233-5328 FAX (866) 933-1933
 e-mail: support@electeonline.com


OWNERSHIP OF DOCUMENTS

This drawing and accompanying information as instrument of service are the property of **ELECTEC**.
 Reproduction or use in whole or in part in any form whether the work for which they are presented is executed or not is forbidden without the express written permission of **ELECTEC**.

STARTER CABLE

101125SCSccllld

DRAWN BY: J.Y.	APPROVED: D.H.	101125SCS.8
DATE: 27-NOV-08	SCALE: N.T.S.	

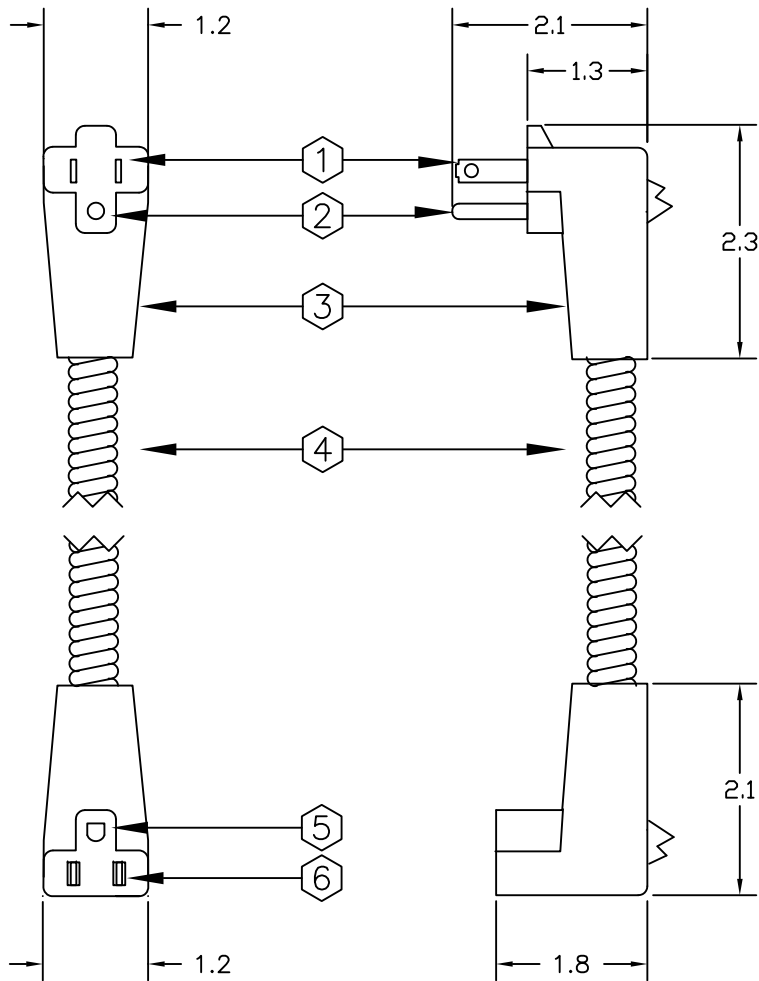

- ① BRASS BLADE
- ② BRASS GROUND PIN
- ③ MOULDED THERMOPLASTIC
- ④ "ULTRALX" AC90/MC or AC90 or MC LS 600V 90°C (CSA 22.2 No. 51-95 and UL 1569)
- ⑤ BRASS GROUND TERMINAL
- ⑥ BRASS TERMINAL

WHERE "cc" REPRESENTS COLOUR CODE I.E. "BK" IS BLACK
 WHERE "d" REPRESENTS CERTIFIED WIRING MATERIAL. I.E. "A" IS AC90
 WHERE "III" REPRESENTS LENGTH CODE I.E. "040" IS 04.0 METERS

SYSTEM IS RATED FOR CONNECTION TO A GROUNDED 125V BRANCH CIRCUIT.
MANUFACTURED WIRING SYSTEM UTILIZING 12 AWG APPROVED ULTRALX CABLE.
INSTALLATION IN ACCORDANCE WITH THE CEC PART I OR THE NEC.
ACCEPTABLE FOR USE IN ENVIRONMENTAL AIR SPACES OTHER THAN DUCTS OR PLENUMS
PER CEC PART I 12-010(3) OR NEC 300-22(C)
MEETS OR EXCEEDS: - CSA 22.2 NO. 203.1
- UL 183
ACCEPTABLE MEANS FOR DISCONNECTING LUMINAIRES
PER CEC PART I 30-308(4) OR NEC 410.73(G).




125 Volt 20 Amp

CDN. PATENT - 1219307

U.S. PATENT - 4775802

ITEM	DESCRIPTION	PART#/POSITION	REMARKS
4	BARE	1	GROUND
	WHITE	2	NEUTRAL
	BLACK	3	LINE



100-5977 HAZELDEAN ROAD, OTTAWA, ONTARIO, CANADA K2S 1B9
 TELEPHONE (613) 836-0300 FAX (613) 836-0391
 TOLL-FREE (866) 233-5328 FAX (866) 933-1933
 e-mail: support@electeonline.com


OWNERSHIP OF DOCUMENTS

This drawing and accompanying information as instrument of service are the property of **ELECTEC**. Reproduction or use in whole or in part in any form whether the work for which they are presented is executed or not is forbidden without the express written permission of **ELECTEC**.

JOINER CABLE

102125JCSccIIId

DRAWN BY: J.Y.	APPROVED: D.H.	102125JCS.8
DATE: 27-NOV-08	SCALE: N.T.S.	

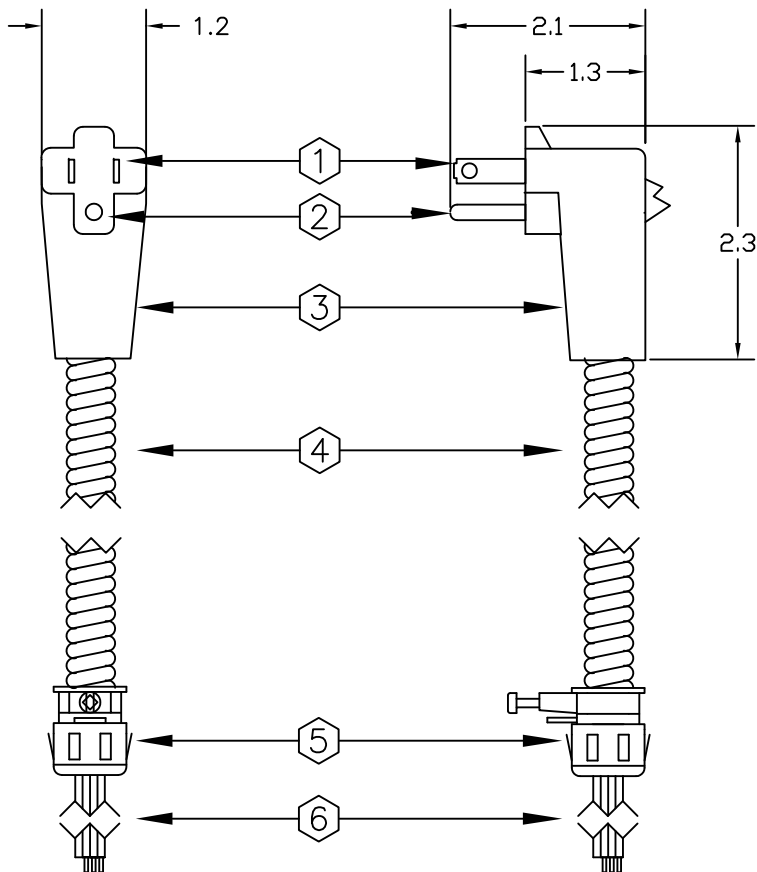

- ① BRASS BLADE
- ② BRASS GROUND PIN
- ③ MOULDED THERMOPLASTIC
- ④ "ULTRALX" AC90/MC or AC90 or MC LS 600V 90°C (CSA 22.2 No. 51-95 and UL 1569)
- ⑤ LOCKNUTLESS BOX CONNECTOR 1/2" K.O.
- ⑥ TAIL WITH STRIPPED ENDS

WHERE "cc" REPRESENTS COLOUR CODE I.E. "BK" IS BLACK
 WHERE "d" REPRESENTS CERTIFIED WIRING MATERIAL. I.E. "A" IS AC90
 WHERE "III" REPRESENTS LENGTH CODE I.E. "040" IS 04.0 METERS

**SYSTEM IS RATED FOR CONNECTION TO A GROUNDED 125V BRANCH CIRCUIT.
 MANUFACTURED WIRING SYSTEM UTILIZING 12 AWG APPROVED ULTRALX CABLE.
 INSTALLATION IN ACCORDANCE WITH THE CEC PART I OR THE NEC.
 ACCEPTABLE FOR USE IN ENVIRONMENTAL AIR SPACES OTHER THAN DUCTS OR PLENUMS
 PER CEC PART I 12-010(3) OR NEC 300-22(C)
 MEETS OR EXCEEDS: - CSA 22.2 NO. 203.1
 - UL 183**

**ACCEPTABLE MEANS FOR DISCONNECTING LUMINARIES
 PER CEC PART I 30-308(4) OR NEC 410.73(G).**

Manufactured with "AC90/MC" Manufactured with "AC90" Manufactured with "MC"

 C US LR 91749 US

125 Volt 20 Amp

CDN. PATENT - 1219307

U.S. PATENT - 4775802

ITEM	DESCRIPTION	PART#/POSITION	REMARKS
4	BARE	1	GROUND
	WHITE	2	NEUTRAL
	BLACK	3	LINE

100-5977 HAZELDEAN ROAD, OTTAWA, ONTARIO, CANADA K2S 1B9
 TELEPHONE (613) 836-0300 FAX (613) 836-0391
 TOLL-FREE (866) 233-5328 FAX (866) 933 1933
 e-mail: support@electeonline.com


OWNERSHIP OF DOCUMENTS

This drawing and accompanying information as instrument of service are the property of **ELECTEC**.
 Reproduction or use in whole or in part in any form whether the work for which they are presented is executed or not is forbidden without the express written permission of **ELECTEC**.

DROP CABLE

102125JCSTccIIId

DRAWN BY: J.Y.	APPROVED: D.H.	102125JCST.8
DATE: 27-NOV-08	SCALE: N.T.S.	

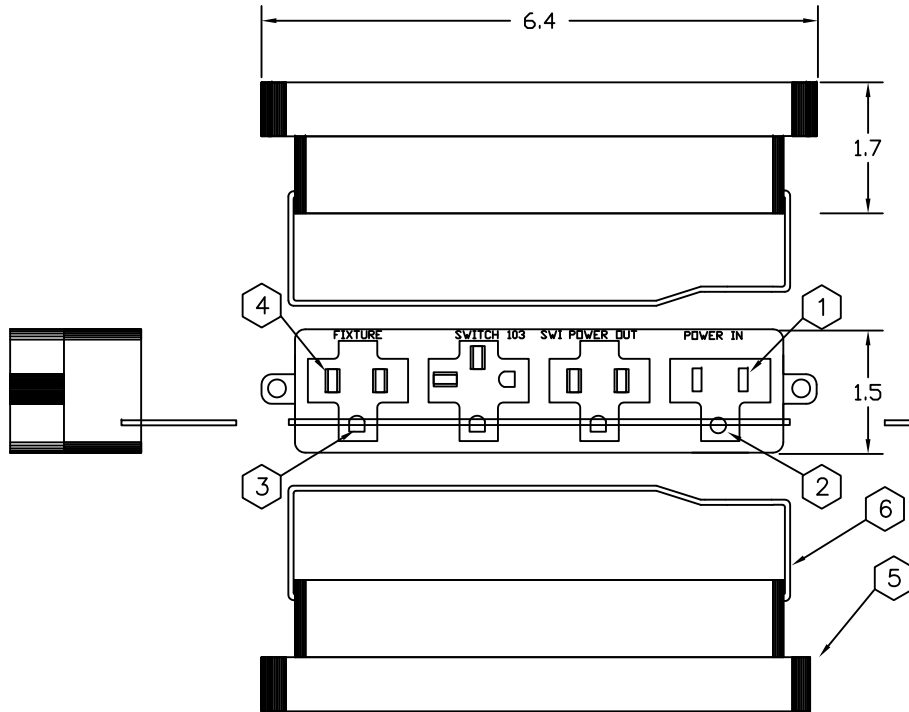

- 1 BRASS BLADE
- 2 BRASS GROUND PIN
- 3 BRASS GROUND TERMINAL
- 4 BRASS TERMINAL
- 5 MOULDED THERMOPLASTIC
- 6 RETAINING CLIP

WHERE "cc" REPRESENTS COLOUR CODE I.E. "BK" IS BLACK

SYSTEM IS RATED FOR CONNECTION TO A GROUNDED 125V BRANCH CIRCUIT.
INSTALLATION IN ACCORDANCE WITH THE CEC PART I OR THE NEC.
ACCEPTABLE FOR USE IN ENVIRONMENTAL AIR SPACES OTHER THAN DUCTS OR PLENUMS
PER CEC PART I 12-010(3) OR NEC 300-22(C).
MEETS OR EXCEEDS: - CSA 22.2 NO. 203.1
- UL 183



125 Volt 20 Amp

CDN. PATENT - 1219307

U.S. PATENT - 4775802


ITEM	DESCRIPTION			



100-5977 HAZELDEAN ROAD, OTTAWA, ONTARIO, CANADA K2S 1B9
 TELEPHONE (613) 836-0300 FAX (613) 836-0391
 TOLL-FREE (866) 233-5328 FAX (866) 933-1933
 e-mail: support@electeonline.com

OWNERSHIP OF DOCUMENTS
 This drawing and accompanying information as instrument of service are the property of **ELECTEC**.
 Reproduction or use in whole or in part in any form whether the work for which they are presented be executed or not is forbidden without the express written permission of **ELECTEC**.

SWITCH TAP		103125SWI.8
103125SWIcc		
DRAWN BY: J.Y.	APPROVED: D.H.	103125SWI.8
DATE: 10-DEC-08	SCALE: N.T.S.	

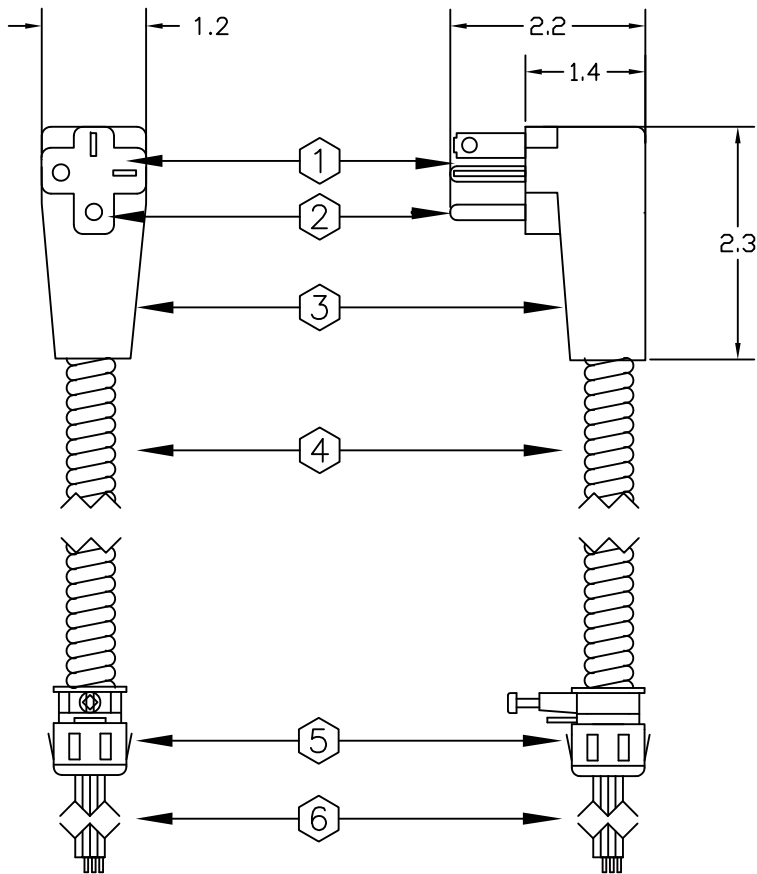

- ① BRASS BLADE
- ② BRASS GROUND PIN
- ③ MOULDED THERMOPLASTIC
- ④ "ULTRALX" AC90/MC or AC90 or MC LS 600V 90°C (CSA 22.2 No. 51-95 and UL 1569)
- ⑤ LOCKNUTLESS BOX CONNECTOR 1/2" K.O.
- ⑥ TAIL WITH STRIPPED ENDS

WHERE "cc" REPRESENTS COLOUR CODE I.E. "BK" IS BLACK
 WHERE "d" REPRESENTS CERTIFIED WIRING MATERIAL. I.E. "A" IS AC90
 WHERE "l" REPRESENTS LENGTH CODE I.E. "040" IS 04.0 METERS

SYSTEM IS RATED FOR CONNECTION TO A GROUNDED 125V BRANCH CIRCUIT.
MANUFACTURED WIRING SYSTEM UTILIZING 12 AWG APPROVED ULTRALX CABLE.
INSTALLATION IN ACCORDANCE WITH THE CEC PART I OR THE NEC.
ACCEPTABLE FOR USE IN ENVIRONMENTAL AIR SPACES OTHER THAN DUCTS OR PLENUMS
PER CEC PART I 12-010(3) OR NEC 300-22(C)
MEETS OR EXCEEDS: - CSA 22.2 NO. 203.1
- UL 183




125 Volt 20 Amp

CDN. PATENT - 1219307

U.S. PATENT - 4775802

ITEM	DESCRIPTION	PART#/POSITION	REMARKS
4	BARE	1	GROUND
	WHITE	2	LINE
	BLACK	3	SWITCH LEG/RETURN
		4	NOT CONNECTED



100-3977 HAZELDEAN ROAD, OTTAWA, ONTARIO, CANADA K2S 1B9
 TELEPHONE (613) 836-0300 FAX (613) 836-0391
 TOLL-FREE (866) 233-5328 FAX (866) 933-1933
 e-mail: support@electeonline.com


OWNERSHIP OF DOCUMENTS

This drawing and accompanying information as instrument of service are the property of **ELECTEC**.
 Reproduction or use in whole or in part in any form whether the work for which they are presented is executed or not is forbidden without the express written permission of **ELECTEC**.

SWITCH CABLE

104125SWCSccllId

DRAWN BY: J.Y.	APPROVED: D.H.	104125SWCS.3
DATE: 27-NOV-08	SCALE: N.T.S.	

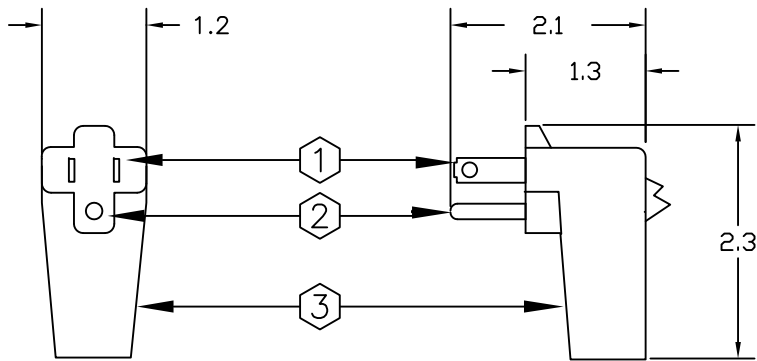

- ① BRASS BLADE
- ② BRASS GROUND PIN
- ③ MOULDED THERMOPLASTIC

WHERE "cc" REPRESENTS COLOUR CODE I.E. "BK" IS BLACK

SYSTEM IS RATED FOR CONNECTION TO A GROUNDED 125V BRANCH CIRCUIT.
MANUFACTURED WIRING SYSTEM UTILIZING 12 AWG APPROVED ULTRALX CABLE.
INSTALLATION IN ACCORDANCE WITH THE CEC PART I OR THE NEC.
ACCEPTABLE FOR USE IN ENVIRONMENTAL AIR SPACES OTHER THAN DUCTS OR PLENUMS
PER CEC PART I 12-010(3) OR NEC 300-22(C)
MEETS OR EXCEEDS: - CSA 22.2 NO. 203.1
- UL 183



LR 91749

125 Volt 20 Amp

CDN. PATENT - 1219307

U.S. PATENT - 4775802

ITEM	DESCRIPTION	PART#/POSITION	REMARKS



100-5977 HAZELDEAN ROAD, OTTAWA, ONTARIO, CANADA K2S 1B9
 TELEPHONE (613) 836-0300 FAX (613) 836-0391
 TOLL-FREE (866) 233-5328 FAX (866) 933-1933
 e-mail: support@electeonline.com


OWNERSHIP OF DOCUMENTS
 This drawing and accompanying information as instrument of service are the property of **ELECTEC**.
 Reproduction or use in whole or in part in any form whether the work for which they are presented is executed or not is forbidden without the express written permission of **ELECTEC**.

BLANKING PLUG

105125BPcc


DRAWN BY: J.Y.	APPROVED: D.H.
DATE: 27-NOV-08	SCALE: N.T.S.

105125BP.6

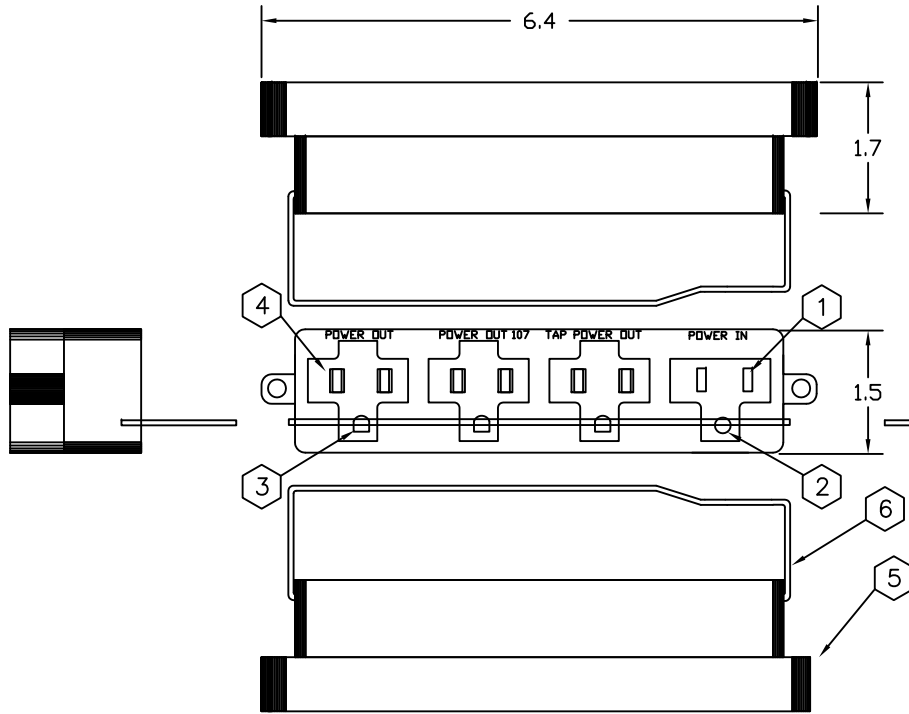

- ① BRASS BLADE
- ④ BRASS TERMINAL
- ② BRASS GROUND PIN
- ⑤ MOULDED THERMOPLASTIC
- ③ BRASS GROUND TERMINAL
- ⑥ RETAINING CLIP

WHERE "cc" REPRESENTS COLOUR CODE I.E. "BK" IS BLACK

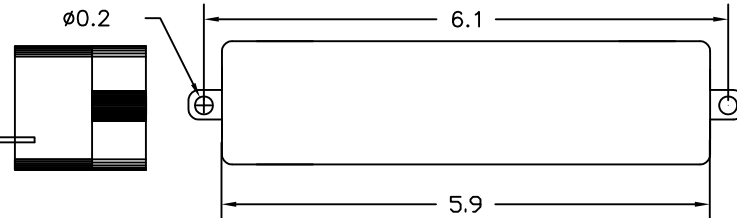

**SYSTEM IS RATED FOR CONNECTION TO A GROUNDED 125V BRANCH CIRCUIT.
 INSTALLATION IN ACCORDANCE WITH THE CEC PART I OR THE NEC.
 ACCEPTABLE FOR USE IN ENVIRONMENTAL AIR SPACES OTHER THAN DUCTS OR PLENUMS
 PER CEC PART I 12-010(3) OR NEC 300-22(C).
 MEETS OR EXCEEDS: - CSA 22.2 NO. 203.1
 - UL 183**



125 Volt 20 Amp

CDN. PATENT - 1219307

U.S. PATENT - 4775802

ITEM	DESCRIPTION		

100-5977 HAZELDEAN ROAD, OTTAWA, ONTARIO, CANADA K2S 1B9
 TELEPHONE (613) 836-0300 FAX (613) 836-0391
 TOLL-FREE (866) 233-5328 FAX (866) 933-1933
 e-mail: support@electeonline.com

OWNERSHIP OF DOCUMENTS
 This drawing and accompanying information as instrument of service are the property of **ELECTEC**.
 Reproduction or use in whole or in part in any form whether the work for which they are presented be executed or not is forbidden without the express written permission of **ELECTEC**.

MULTI TAP

107125TAP_{cc}

DRAWN BY: J.Y.

DATE: 10-DEC-08

APPROVED: D.H.

SCALE: N.T.S.

107125TAP.8