

# ULTRALX<sup>®</sup> AC90 EZ-Whips

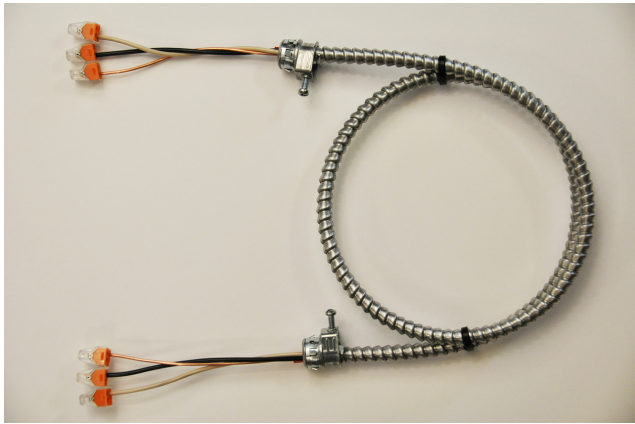
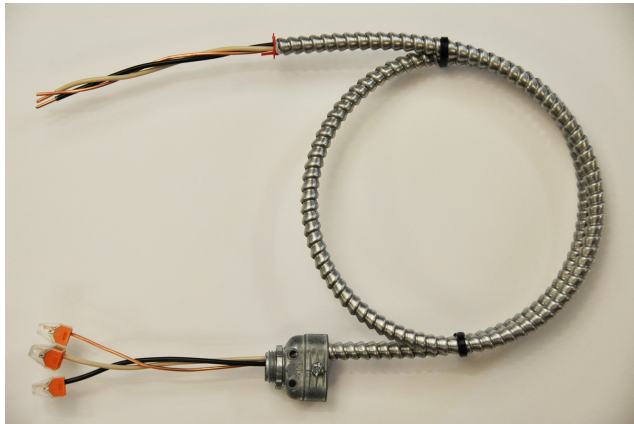
Meets or exceeds the following requirements:

- CSA 22.2 No. 203.1 (Manufactured Wiring Systems)



## Features

- Realize up to 45% labour savings using snap-in and push-in WAGO<sup>®</sup> connectors.
- Snap-in design excellent for retrofit applications.
- For use in lighting and branch circuit applications.
- No tools. No wire nuts required.
- CSA Certified Wiring Systems for use in Canada. Complies with the CEC and NEC.
- Constructed with ULTRALX AC90 Armoured Cable (Meeting CSA 22.2 No. 51-95).
- Lighter and more compact than flexible conduit products.
- Available in a variety of construction options to suit multiple project environments.
- 4m standard lengths. Other lengths available on request.

<p><b>“QUICK-CONNECT” Whip</b> Designed for direct connection to fixture from outlet box</p> 			<p><b>“DAISY-CHAIN” Whip</b> Designed for daisy-chaining of fixtures</p> 		
ULTRALX Quick Connect Whip Catalogue Numbers			ULTRALX Daisy Chain Whip Catalogue Numbers		
Configuration	Standard Connectors	Snap-In Connectors	Configuration	Standard Connectors	Snap-In Connectors
14/2	A/UQCAC142SO	A/UQCSTAC142SO	14/2	A/UDCAC142SO	A/UDCSTAC142SO
14/3	A/UQCAC143SO	A/UQCSTAC143SO	14/3	A/UDCAC143SO	A/UDCSTAC143SO
14/4	A/UQCAC144SO	A/UQCSTAC144SO	14/3	A/UDCAC144SO	A/UDCSTAC144SO
12/2	A/UQCAC122SO	A/UQCSTAC122SO	12/2	A/UDCAC122SO	A/UDCSTAC122SO
12/3	A/UQCAC123SO	A/UQCSTAC123SO	12/3	A/UDCAC123SO	A/UDCSTAC123SO
12/4	A/UQCAC124SO	A/UQCSTAC124SO	12/4	A/UDCAC124SO	A/UDCSTAC124SO
14/2 +IG	A/UQCAC142IGSO	A/UQCSTAC142IGSO	14/2 +IG	A/UDCAC142IGSO	A/UDCSTAC142IGSO
12/2 +IG	A/UQCAC122IGSO	A/UQCSTAC122IGSO	12/2 +IG	A/UDCAC122IGSO	A/UDCSTAC122IGSO
12/2 +DALI	A/UQCAC122DALISO	A/UQCSTAC122DALISO	12/2 +DALI	A/UDCAC122DALISO	A/UDCSTAC122DALISO
Add “W” to end of Cat no. for WAGO connectors added.			Add “W” to end of Cat no. for WAGO connectors added.		
Standard Length 4m		Packaging: 40/box 320/lot	Standard Length 4m		Packaging: 40/box 320/lot