

Phase Tap



Delivers multi-circuit distribution point for EZ-Wiring MWS

Pre-wired enclosure provides cost-effective installation of modular wiring system distribution centers.


Converts 8-wire (up to 4 circuit) input into individual circuit connection points. Suitable for power distribution and lighting.

Specifications


- Compact 1U height
- 16 gauge galvanized steel enclosure
- Integrated mounting brackets for flexible installation options
- Connectors are integrally moulded for superior strength and reliability.
- Mating connectors are self-latching and shrouded for added safety and protection.
- Uniquely-keyed, colour-coded mating connectors ensure safe, simple and error-free connectivity.
- Robust terminals deliver excellent electrical performance.
- Manufactured with Eco-Friendly Halogen-free RoHS-compliant materials.
- UL 183 and CSA 22.2 No 203.1 certified Manufactured Wiring System
- Approved for luminaire disconnect per NEC 410.73(g) and CEC Part 1 30-308(4)
- Acceptable for use in environmental air handling spaces per NEC 300-22(c) and CEC Part 1 12-010(3)

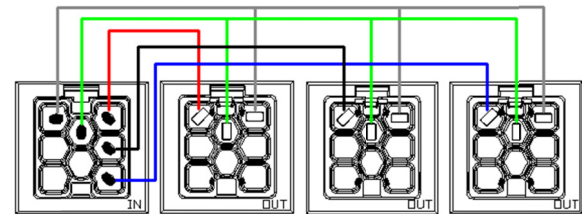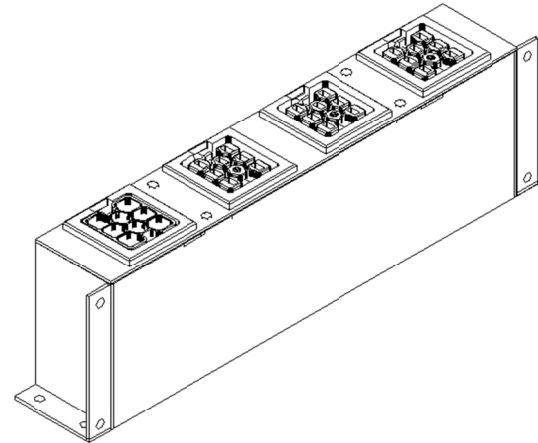

5-wire 3-Phase Selector (347/600V 20A SH0W11)

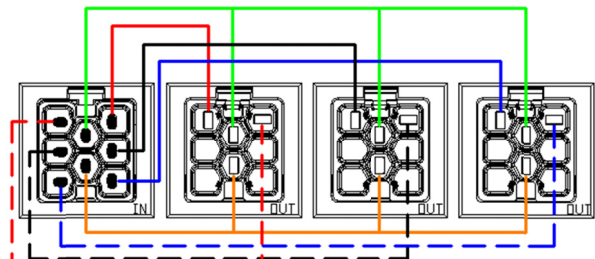

8-wire 3L, 3N, 2G Phase Selector

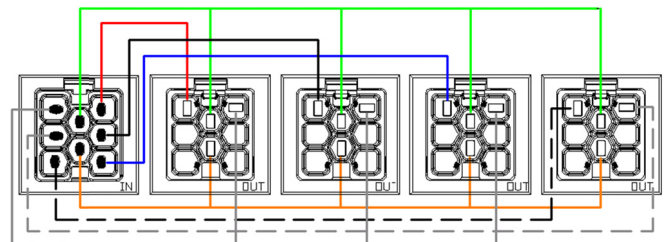

8-Wire 4L, 2N, 2G Phase Selector

Ordering Information

5-wire 3-Phase Selector

Cat No. 1H - **VC** - 3110 - B100203-Z

where,

VC System	22 = 125/250V 20A
	42 = 277/480V 20A
	62 = 347/600V 20A

8-wire 3L, 3N, 2G (125/250V 20A) Phase Selector

Cat No. 1H -22 - 3320 - B100203-Z

8-wire 4L, 2N, 2G (125/250V 20A) Phase Selector

Cat No. 1H -22 - 4220 - B100203-Z

For configurations not shown here, please contact Electec

