

- ① BRASS MALE PIN
- ② MOULDED THERMOPLASTIC
- ③ CERTIFIED WIRING MATERIAL
- ④ RETAINING CLIP

WHERE "cc" REPRESENTS COLOUR CODE I.E. "BK" IS BLACK

**ACCEPTABLE MEANS FOR DISCONNECTING LUMINARIES**  
**ACCEPTABLE FOR USE IN ENVIRONMENTAL AIR SPACES OTHER THAN DUCTS OR PLENUMS.**  
**SYSTEM IS RATED FOR CONNECTION TO A GROUNDED 125/250V BRANCH CIRCUIT.**

**MEETS OR EXCEEDS:** - CSA 22.2 NO. 182.3  
 - CSA 22.2 NO. 203.1  
 - UL 1977  
 - UL 183



125/250 Volt 20 Amp

CDN. PATENT - 1219307

U.S. PATENT - 4775802

ITEM	DESCRIPTION	PART#/POSITION	REMARKS
3	GREEN	1	GROUND
	WHITE	2	NEUTRAL
	RED	3	LINE CCT. 1/PHASE A
	BLACK	4	LINE CCT. 2/PHASE B
	BLUE	5	LINE CCT. 3/PHASE C

100-5977 HAZELDEAN ROAD, OTTAWA, ONTARIO, CANADA K2S 1B9  
 TELEPHONE (613) 836-0300 FAX (613) 836-0391  
 TOLL-FREE (866) 233-5328 FAX (866) 933-1933  
 e-mail: support@electeconline.com

**OWNERSHIP OF DOCUMENTS**  
 This drawing and accompanying information as instrument of service are the property of **ELECTEC**.  
 Reproduction or use in whole or in part in any form whether the work for which they are presented is executed or not is forbidden without the express written permission of **ELECTEC**.


SINGLE PLUG

w6Pcc

DRAWN BY: J.Y.	APPROVED: D.H.	w6P.2
DATE: 21-OCT-08	SCALE: N.T.S.	





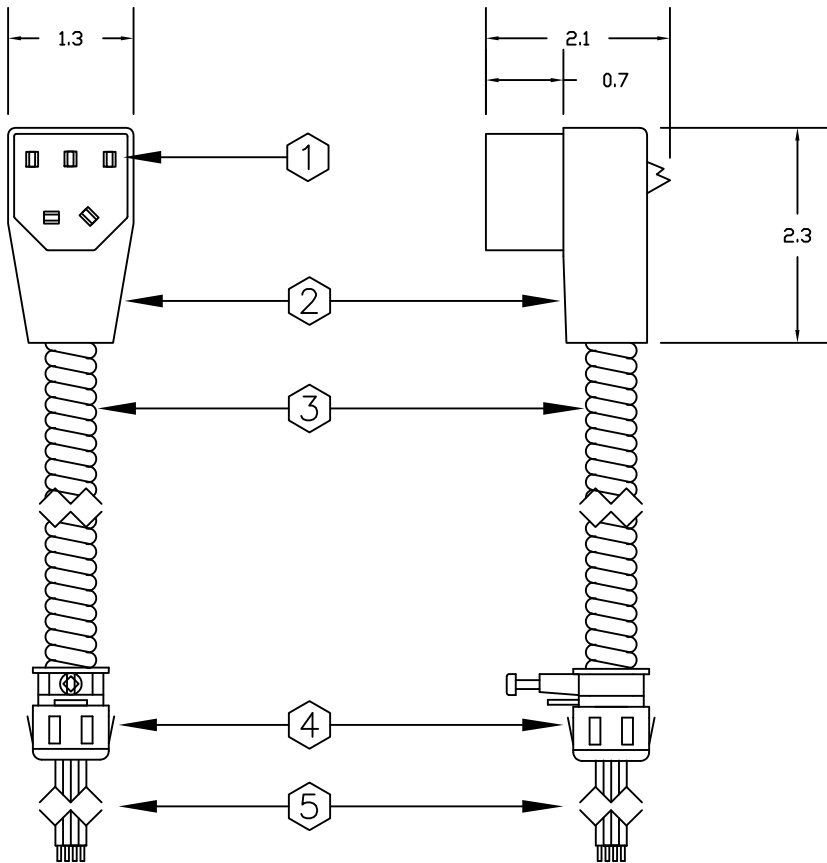

- ① BRASS TERMINAL
- ② MOULDED THERMOPLASTIC
- ③ "ULTRALX" AC90/MC or AC90 or MC LS 600V 90°C (CSA 22.2 No. 51-95 and/or UL 1569)
- ④ LOCKNUTLESS BOX CONNECTOR 1/2" K.O.
- ⑤ TAILS WITH STRIPPED ENDS

WHERE "cc" REPRESENTS COLOUR CODE I.E. "BK" IS BLACK  
 WHERE "d" REPRESENTS CERTIFIED WIRING MATERIAL I.E. "A" IS AC90  
 WHERE "l" REPRESENTS LENGTH CODE I.E. "040" IS 04.0 METERS  
 WHERE "w" REPRESENTS NUMBER OF WIRES FROM 3 TO 5

**SYSTEM IS RATED FOR CONNECTION TO A GROUNDED 125/250V BRANCH CIRCUIT.**  
**MANUFACTURED WIRING SYSTEM UTILIZING 12 AWG APPROVED ULTRALX CABLE.**  
**INSTALLATION IN ACCORDANCE WITH THE CEC PART I OR THE NEC.**  
**ACCEPTABLE FOR USE IN ENVIRONMENTAL AIR SPACES OTHER THAN DUCTS OR PLENUMS**  
**PER CEC PART I 12-010(3) OR NEC 300-22(C)**  
**MEETS OR EXCEEDS: - CSA 22.2 NO. 203.1**  
**- UL 183**  
**ACCEPTABLE MEANS FOR DISCONNECTING LUMINAIRES**  
**PER CEC PART I 30-308(4) OR NEC 410.73(G).**



125/250 Volt 20 Amp

CDN. PATENT - 1219307

U.S. PATENT - 4775802

ITEM	DESCRIPTION	PART#/POSITION	REMARKS
3	BARE	1	GROUND
	WHITE	2	NEUTRAL
	RED	3	LINE CCT. 1/PHASE A
	BLACK	4	LINE CCT. 2/PHASE B
	BLUE	5	LINE CCT. 3/PHASE C



100-5977 HAZELDEAN ROAD, OTTAWA, ONTARIO, CANADA K2S 1B9  
 TELEPHONE (613) 836-0300 FAX (613) 836-0391  
 TOLL-FREE (866) 233-5328 FAX (866) 933-1933  
 e-mail: support@electeonline.com

**OWNERSHIP OF DOCUMENTS**  
 This drawing and accompanying information as instrument of service are the property of **ELECTEC**.  
 Reproduction or use in whole or in part in any form whether the work for which they are presented be executed or not is forbidden without the express written permission of **ELECTEC**.

**STARTER CABLE**

w6FTccllld

DRAWN BY: J.Y.	APPROVED: D.H.	w6FT.8
DATE: 10-DEC-08	SCALE: N.T.S.	







